


Comet System Universal monitoring system MS6

Optional Ethernet Interface

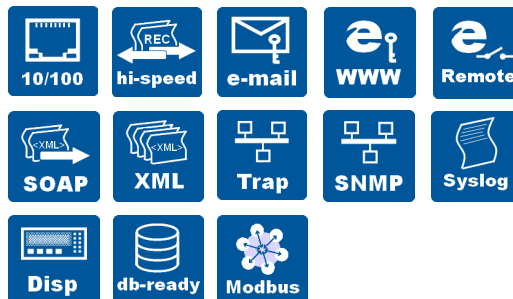

Ethernet interface

Data logger is designed for connection to standard computer network. The 10 and 100Mb/s Ethernet is supported.

No need to build new data lines. Thanks this installation cost are essentially reduced and instant easy start of monitoring system operation is enabled.



Fast data download

Record download speed was increased four-times from previous MS5 data logger generation.



E-mail

Data logger sends warning emails up to three different addresses. E-mail is immediately sent after alarm state of monitored technological process appears. User is also informed on error states of device itself (measuring channel error, fulfilling of internal memory, self-test error). SMTP servers requiring authentication are also supported.



Secured WEB server

WWW server is built in the device. Here it is possible to monitor actual values, alarm states and information on data logger. Also access password for www pages can be

entered.

WWW pages are user modifiable. Free SDK description is available to create own www pages.



WWW remote conditions

Control of remote condition and relays is enabled also via www interface.



SOAP protocol

Protocol designed for data logger integration to own www infrastructure. Available actual values can be captured by www server (Apache, IIS) and processed by the user. Communication protocol SOAP version 1.1. is supported. By means of this protocol data logger sends actual values in preset intervals to specified server.



Modbus TCP PROTOCOL

Actually measured values can be acquired by means of Modbus protocol standard. This protocol is frequently used with SCADA or industry automation systems.



XML file

Actual values can be downloaded to XML file. This

option is suitable for data logger integration to SCADA systems.



SNMPv1 protocol

Actually measured values can be acquired by means of SNMPv1 protocol. MIB tables are available for free. Designed especially for IT applications.



SNMP Trap

SNMP Traps are sent after alarm state or device error appears.



Syslog protocol

Syslog message is sent after alarm state or data logger error appears. Syslog is compatible with RFC5424.



Data logger display

Basic network parameters can be set directly from data logger display. It is possible to change IP address, subnetwork mask and gateway.



Database system

Prepared for connection to database system including online values transfer.