




# TEMPERATURE PROBES with type K thermocouple for thermometers C0311, D0311, C0321, D0321 and for monitoring systems MS5D, MS5


**Probe tolerances:** class 1 in accordance with IEC584-2  $\pm 1.5^{\circ}\text{C}$  or  $\pm 0.004 \times t$  (whichever is greater)




**Fast response multi-purpose wire probe**  
lengths 1m, 2m, 3m, 4m

- type GD 260** -65 to 260 °C teflon insulated, 0,8mm diameter with subminiature male connector
- type GD 700** -65 to 700 °C duplex insulated - glass, 2mm diameter with subminiature male connector
- type GD 1250** -65 to 980 °C duplex insulated - Nextel ceramic, 4mm diameter with subminiature male connector
- type GD 260/0** -65 to 260 °C teflon insulated, 0,8mm diameter, connection end - uninsulated wires for connection to MS5
- type GD 700/0** -65 to 700 °C duplex insulated - glass, 2mm diameter, connection end - uninsulated wires for connection to MS5
- type GD 1250/0** -65 to 980 °C duplex insulated - Nextel ceramic, 4mm diameter, connection end - uninsulated wires for connection to MS5


**SNP04 self-adhesive labels** 25x40 mm to secure wire probes to surfaces, temperature range -70 to 260 °C, package of 20 labels




**Fast response surface probe**  
for flat surface  
**type CP 500** -65 to 500 °C




**Fast penetration needle probe**  
for soft materials  
**type CZ 550** -65 to 550 °C




**Penetration needle probe**  
for soft materials  
**type CZ 900** -65 to 1000 °C



**Insertion probe**  
for fluids and gases  
**type GT1150** -50 to 1150 °C



**SNP03 extension cable type "K"**  
with connectors up to 200 °C,  
duplex insulated.  
Please specify length.

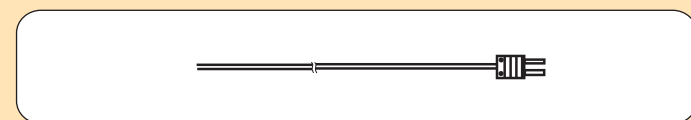

**SNP03/O extension cable type "K"**  
with one female connector up to 200 °C,  
duplex insulated.  
For monitoring system MS5.  
Please specify length.



**Subminiature connector** up to +200 °C  
for thermocouples J, K, S  
(please specify thermocouple type)  
male, female

